

unny Grou 28 30

Sunny Glass are 80


احصل على أفكارك لتصبح منتجات عطرية إبداعية و بيعها بشكل جيد جدا في السوق المحلي



Product





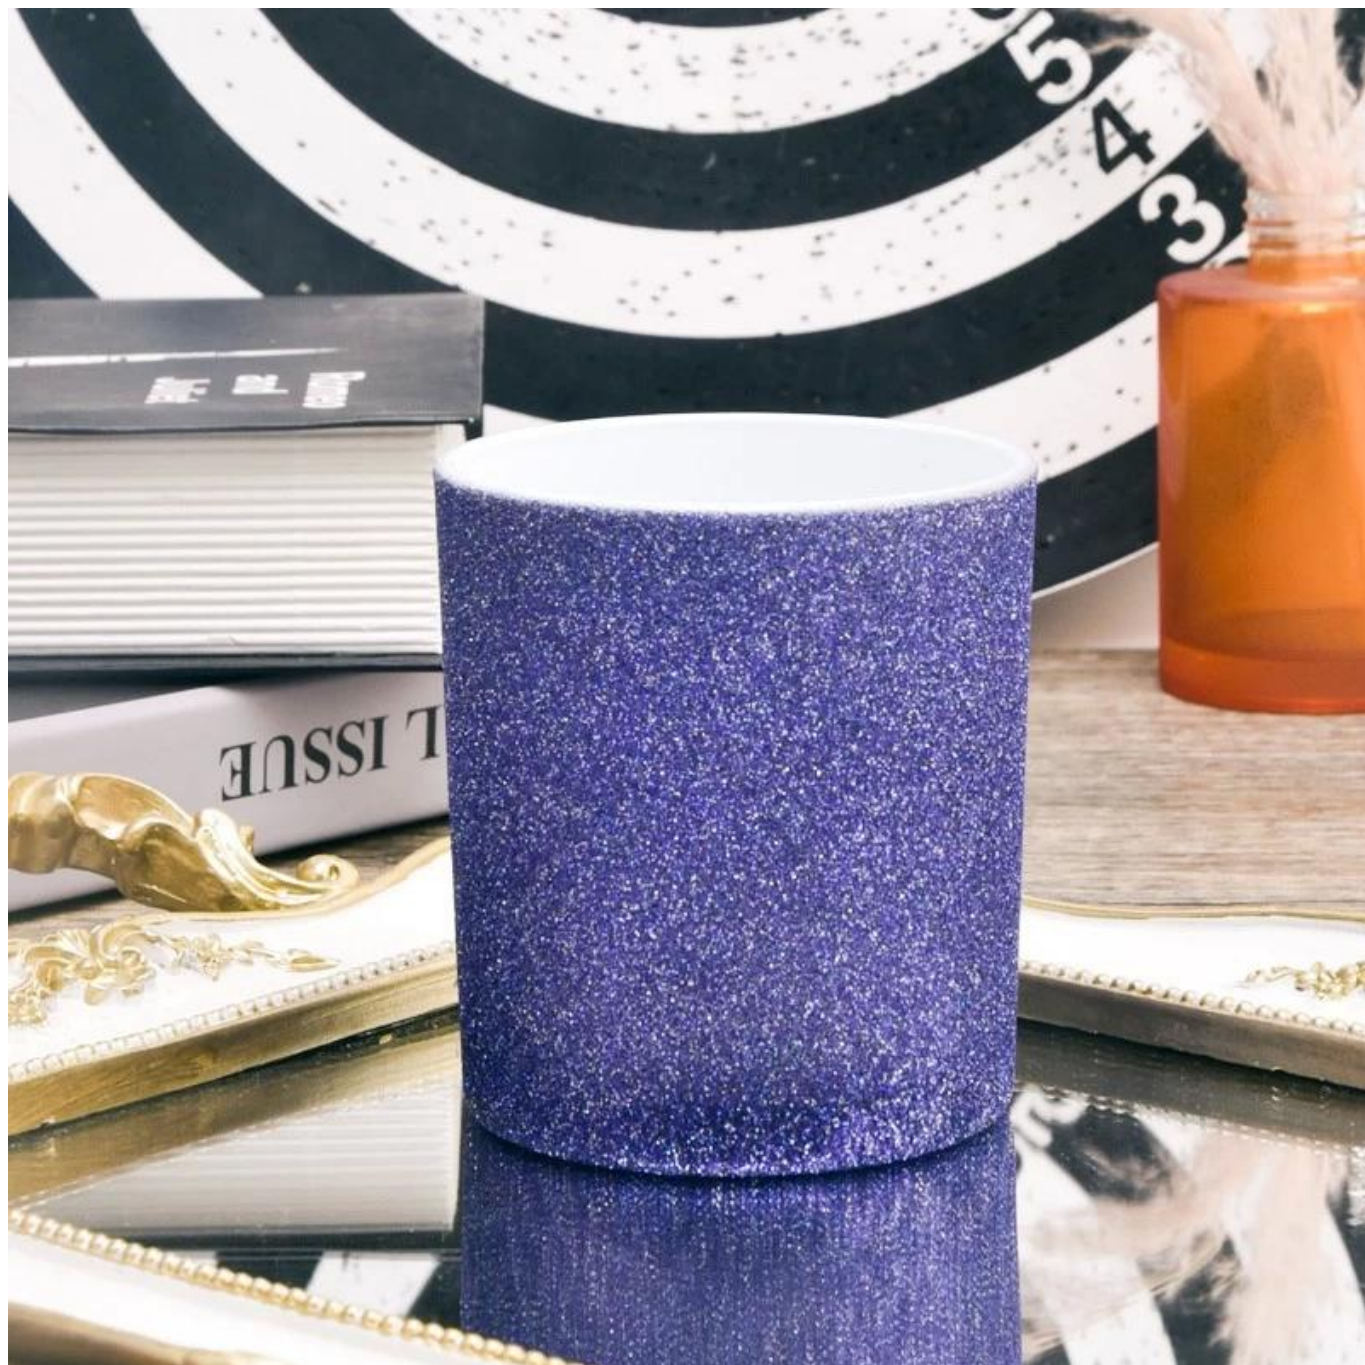







ASTM D1535-01 Standard Test Method for Tensile Properties of Flexible Polyurethane Foams

ASTM D1535-01 : Standard Test Method for Tensile Properties of Flexible Polyurethane Foams

This standard test method covers the tensile properties of flexible polyurethane foams. It includes procedures for determining the tensile strength, elongation at break, and modulus of the material. The test is performed using a tensile testing machine with a suitable fixture and a crosshead speed of 0.05 in./min. (1.27 mm/min).

The test method is applicable to flexible polyurethane foams with a density of 0.02 to 0.08 g/cc (0.3 to 1.2 lb/ft³). The test results are reported in terms of tensile strength, elongation at break, and modulus.

REMINDER

MOQ IS REQUIRED

sales30@sunnyglassware.com